

High Quality
4-Pin-Point Bearing



TPE Damped
Counterweight

EVO Tonearms

High precision tonearms with carbon-fibre armtube

- Flexible high-purity copper inner wiring
- Aluminium bearing block
- Ultra-low friction 4 pin point cardanic tonearm bearing
- Stiff and lightweight carbon tonearm tube
- TPE damped counterweight prevents resonances
- Accurate azimuth and VTA adjustment
- Outside ring is open to prevent bell-mode resonances
- Silicone-damped armlift can be adjusted to suit arm height
- Gold plated 5PIN DIN output socket
- Shiny aluminium parts polished by hand
- Available as CC Black & CC HG version in 9, 10, 12 inch
- Made in Europe

EVO CC Black:

9" 799€ MSRP (incl. VAT)

10" 850€ MSRP (incl. VAT)

12" 899€ MSRP (incl. VAT)

EVO CC HG:

9" 1.299€ MSRP (incl. VAT)

10" 1.350€ MSRP (incl. VAT)

12" 1.399€ MSRP (incl. VAT)

EVO Tonearms

The tonearm is one of the most important parts of a turntable and therefore not only influences, but also shapes the sound in a specific way. We did in-depth listening tests with different bearing types, tonearm materials and also cartridge combinations to develop the sound we are looking for.

About 15 years ago, we released the Evolution tonearm range. These tonearms were a huge success and with this experience we were able to further develop our tonearm design. This new EVO tonearm range is the result of our work from the last years, and we are proud to also offer new finishes and many additional improvements.



10 Insights from our Research

- 01. Resonance damping**
Damped counterweights and super high mass bearing gimbals.
- 02. Conical tubes**
Conical tonearm tube design guarantees that resonances are traveling to the bearing block and also reduce the moving mass of the tonearm/headshell.
- 03. Single-piece tubes**
Single-piece tonearm tubes increase the stiffness & increase the sound transparency.
- 04. Cartridge matching**
Correct tonearm and cartridge matching and the resulting resonance is exceptionally critical for a clean tracking and accurate, controlled bass reproduction.
- 05. Materials**
For low compliance cartridges, you need tonearms with high effective mass, or in other words, tonearms made of aluminum alloys as opposed to carbon.
- 06. High-purity conductors**
High-purity conductors have a significant positive influence on low level cartridge signals, so we use the highest purity copper (Standard EVO) or a pure silver wiring (Premium).
- 07. High mass**
High mass flange design is crucial to fix the tonearm securely to the turntable.
- 08. Tonearm holder**
Massive tonearm holder reduces the overall resonances of the whole tonearm.
- 09. Counterweights**
An assortment of different counterweights is necessary to balance the cartridge correctly.
- 10. Highest precision**
A precision arm can only be made with the highest level of diamond knife machinery, allowing you to work with tolerances of 1/1000 mm.



The Bearing

The new EVO tonearm uses an inverted cardanic ABEC 7 quality bearing with 4 stainless steel tips. This bearing type is very stable and low friction, which guarantees a clear tracking. This results in a detailed and open sound stage. All the microinformation from the groove is preserved.

The bearing sits in a full aluminium housing, which provides the needed stability. The massive outside ring is open to avoid resonances.

Due to the tonearm design, the bearing is maintenance-free and very easy to adjust.

Tonearm tube & inner wiring

The EVO CC tonearm tube is made out of one-piece carbon fiber, which is lightweight and strong at the same time. If you look closely, you can see that the arm tube has a conical shape, which means it gets thinner. This design avoids standing wave reflections.

The arm tube is fixed by a single screw to allow rotation for an easy azimuth adjustment.

The inner wiring is made of flexible high-purity copper which is an optimum conductor for the very small phono signal. Each lead is fitted with a gold-plated connector clip.




Tracking Force & VTA


We supply two counterweights for each tonearm to give you the possibility to use a broad range of cartridges and set the tracking force as accurately as possible. After setting the tracking force, the counterweight should be as close to the bearing block as possible to ensure best stability and keep tonearm inertia as low as possible. Choose the counterweight that sits closer to the bearing block for your given tracking force.

You can find the cartridge weight range for each tonearm length on the last page. The counterweight itself is a new design which features TPE damping to counteract unwanted resonances.

The tonearm height can be continuously adjusted by loosening the two grub screws. It gives you the option of adapting the tonearm to height changes to always achieve the best sound quality. Setting and experimenting with the VTA & Azimuth is crucial in extracting every last bit of performance out of your cartridges.



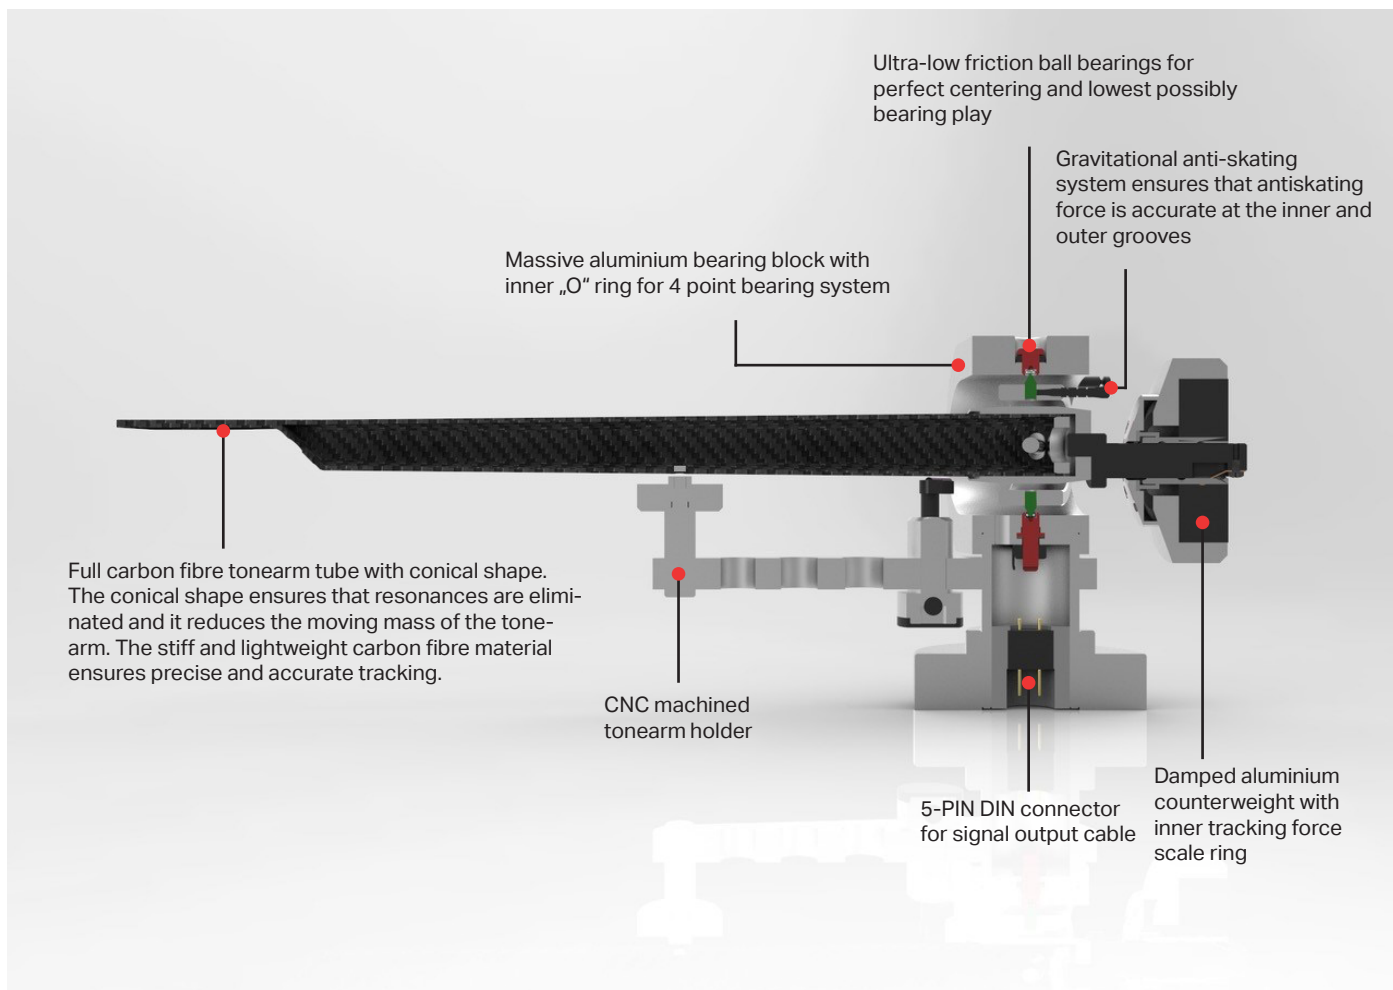

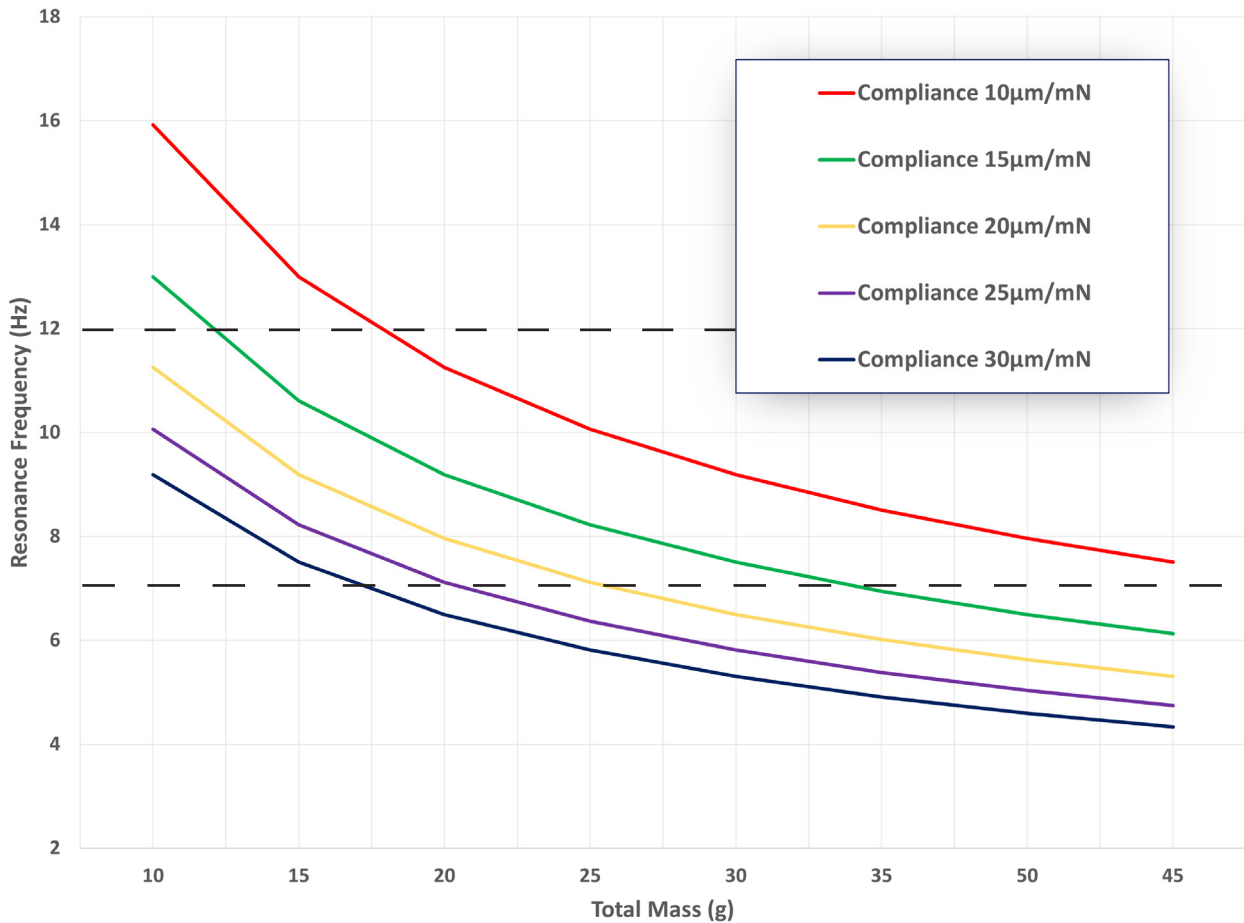

Resonance frequency considerations

When selecting a cartridge for your turntable, the total effective mass of the tonearm (=effective mass of tonearm plus cartridge weight plus mounting hardware) has to be taken into account in relation to the mechanical compliance (elasticity) of the cartridge cantilever system.

This correct mechanical match between cartridge and tonearm is one of the most important factors for neutral sound. A mismatch can result in bad impulse behavior (less resolution of dynamics and micro-dynamics, narrow soundstage, bloated or thin bass). A resonance frequency within 7-12Hz is optimal for the system.

To give the customer the perfect arm for his cartridge, we now offer a very wide variety of tonearms with different effective masses.

EVO CC Tonearms

Suitable for 12 to 30µm/mN

Recommended by Pro-Ject for:
high compliance cartridges
-> 20µm/mN and higher

Our cartridge recommendations:

- Ortofon 2M Series
- Ortofon Quintet Series
- Sumiko Songbird
- Sumiko Blackbird
- Sumiko Moonstone



	12"	10"	9"
Effective tonearm length	304,8 mm	254 mm	230 mm
Mounting distance	291,6 mm	238 mm	212 mm
Offset angle	18°	21,4°	24°
Overhang	13,2 mm	16 mm	18 mm
Pitch of mounting grooves in headshell	12,7 mm	12,7 mm	12,7 mm
Effective tonearm mass	10,5 g	8,5 g	8 g
Cartridge weight	6-15 g	6-14 g	7-14 g
The range of the tracking force	0 - 3 g	0 - 3 g	0 - 3 g
The minimal null point	125 mm	126,8 mm	130,6 mm
The maximal null point	251,7 mm	248,2 mm	243,7 mm
Tonearm weight (without flange)	271g	269g	265g